FPR100s


AN-6 Fuel Pressure Regulator


300-02-201


Assembly Instructions | © Nuke Performance AB 2021


For more information visit: www.nukeperformance.com

- 1 Stainless steel M10 adjustment nut
- 2 Stainless steel M10x40 hex adjustment bolt
- 3 Stainless steel M10 washer
- 4 Viton O-ring 10.5x1.8 for adjustment bolt
- 5 Stainless steel ball bearing ball
- 6 Stainless steel MC6S M6x12 bolt
- 7 Billet aluminum top housing
- **8** 1/16" NPT to 5mm Barb male fitting for vacuum
- 9 Stainless steel top spring seat
- 10 Stainless steel regulator spring
- 11 Stainless steel bracket, mounting point cc 55mm
- **12** Fibre-reinforced nitrile membrane 46mm
- 13 1/8" NPT plug for pressure gauge/sensor
- **14** Billet aluminum bottom housing with AN-6 ORB threads
- 15 Stainless steel M5x5 MF6S bolt

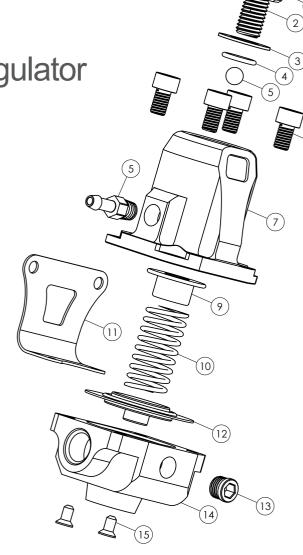

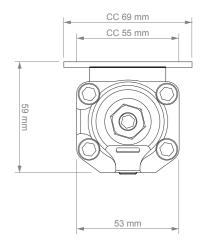

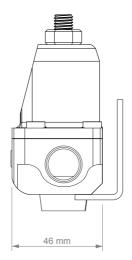

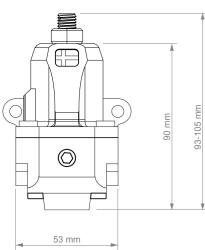





Nuke Performance FPR100s specifications

For more information about specifications, visit our product page on our webiste. Nuke Performance : www.nukeperformance.com

Pressure range	2 - 7 BAR (30 - 100 PSI)
Boost reference	1:1
Horsepower rating	200 - 700 HP
Free fuel flow rating	600 LPH
Fuel compatibility	Gasoline, Petrol, Methanol, Ethanol
Inlet thread	Dual AN-6 ORB
Outlet thread	Single AN-6 ORB
Fuel pressure gauge port	1/8" NDT

Vacuum reference port	1/16" NPT
Diaphragm	46mm Fibre-nitrile diaphragm
Height	93-105mm (3.66-4.13")*
Width	53mm (2.08")
Depth	46mm (1.81")
Weight	352g (12.42oz)
Ball-Bearing adjustment	≈0.14 BAR (≈2 PSI) / turn

^{*} depending on set pressure





